

## Surge Protection Device - Surge Protective Device, 6-Mode, 120/240 VAC 1Ph, Type 1 or Type 2, Outdoor Metal, Connected Equipment Warranty 10 yr \$25,000

Item IG3240RC3



### PRODUCT DESCRIPTION

The IG Series Surge Protective Devices (SPD) are designed for a variety of applications. A green LED indicator provides status of protection. Trusted, state-of-the-art TPMOV® (Thermally Protected Metal Oxide Varistor) surge protection technology eliminates the potentially hazardous failure modes that are commonly associated with standard MOV technology. Type 1 applications include outdoor installations before service entrances and utility meter cabinets. Type 2 applications include installations after service entrances. CSA certified to ANSI/UL 1449, 3rd Edition.

### FEATURES

- ▶ Six modes of surge protection
- ▶ TPMOV® surge protection technology
- ▶ Green LED indicator provides status of protection
- ▶ Type 3R rainproof enclosure for indoor/outdoor applications in metal
- ▶ 10-year product warranty
- ▶ \$25,000 connected equipment warranty on appliances and electronics
- ▶ CSA certified to ANSI/UL 1449 3rd edition

### APPLICATIONS

- ▶ Whole Home Protection

### TECHNICAL DATA

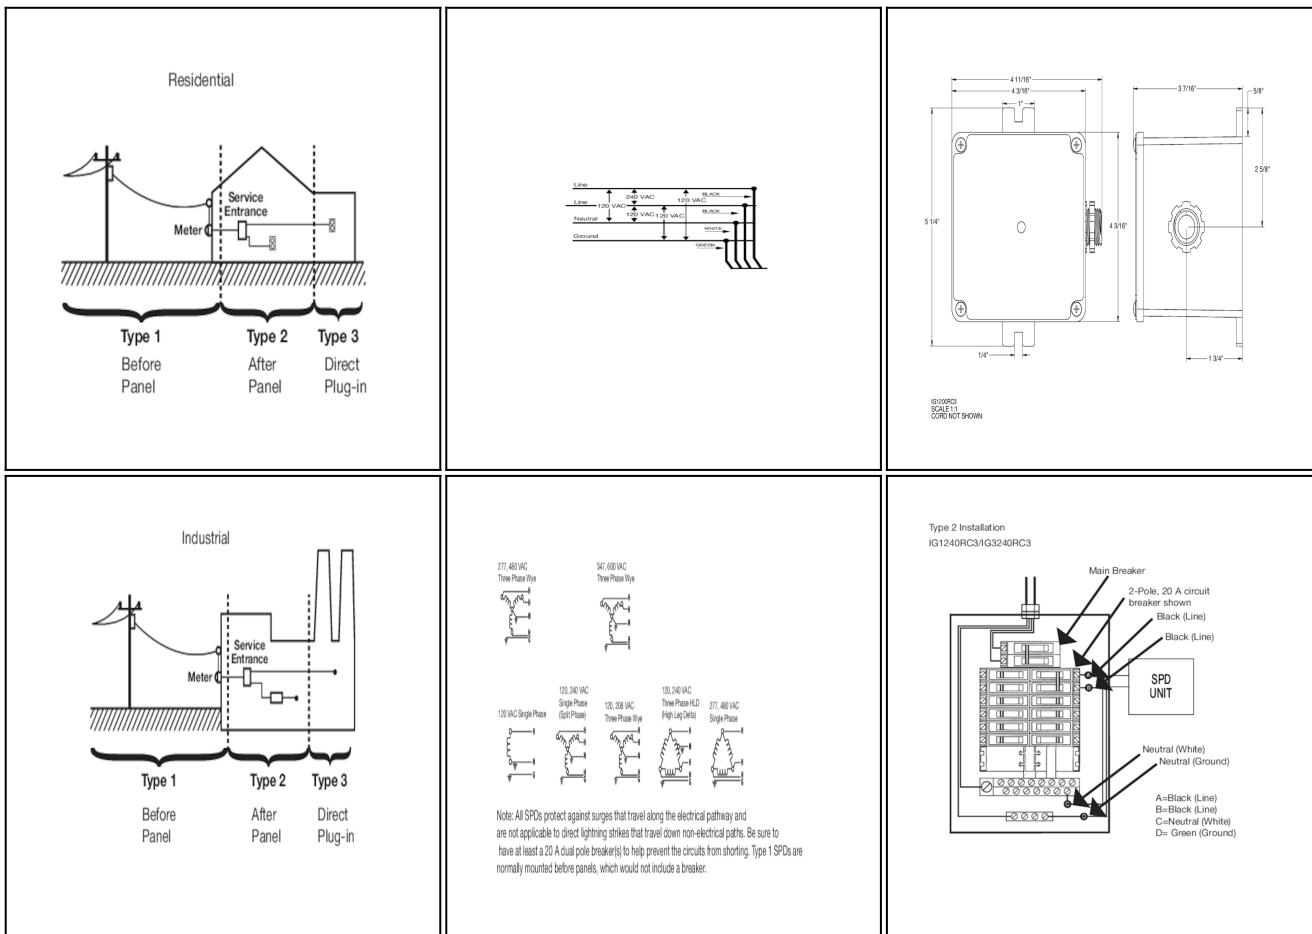
#### General

Model Number	IG3240RC3
Description	Surge Protective Device, 6-Mode, 120/240 VAC 1Ph, Type 1 or Type 2, Outdoor Metal, Connected Equipment Warranty 10 yr \$25,000
UPC Code	078275124400
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	10-Year limited
Connected Equipment Warranty Period	10-Year limited
Connected Equipment Warranty Coverage (USD)	25000
Surge Protection Type	1; 2

#### Electrical Specifications

Modes of Protection	6 (L1-N, L2-N, L1-G, L2-G, N-G, L1-L2)
Short Circuit Current Rating	100 kA
Nominal Discharge Current	20 kA
Maximum Surge Current Rating Per Phase	50 kA
Surge Protection Technology	TPMOV®
Maximum Continuous Operating Voltage (L-G)	300
Maximum Continuous Operating Voltage (L-L)	300
Maximum Continuous Operating Voltage (L-N)	150
Maximum Continuous Operating Voltage (N-G)	150
Voltage Protection Rating (L-G)	1200
Voltage Protection Rating (L-L)	1200
Voltage Protection Rating (L-N)	700

Voltage Protection Rating (N-G)	700
Phase	Single
Voltage	120/240 VAC Single-Phase
<b>Control Specifications</b>	
Surge Protection LED Indicator	Green
<b>Mechanical Specifications</b>	
Number of Wire Leads	4
Enclosure Type	Outdoor type 3R metal
<b>Dimensions</b>	
Product Dimensions (H x W x D) in	4 3/16 x 4 3/16 x 3 7/16 in
Wire Lead Length (in)	30
Wire Size Max	#12 AWG, Tinned Copper
<b>Packaging</b>	
Shipping Weight (lbs)	2.405
Unit Carton Dimensions (H x W x L) in	3.751 x 4.4 x 6.251 in
<b>Environmental Specifications</b>	
Temperature (operation)	-31 °F to 185 °F / (-35 °C to 85 °C)
<b>Standards and Certifications</b>	
CSA Certification	cCSAus SPD Type 1; cCSAus SPD Type 2
UL Standard	Ansi/UL 1449 3rd Edition
California Proposition 65	DEHP

**DRAWINGS AND DIAGRAMS**


---

## ACCESSORIES



IG3240FMP33

Flush Mount Kit for IG3240RC3